




T: +27(21) 706-0440

e: info@escapegear.co.za

w: www.escapegear.com

MODEL:	Hilux Double Cab 2016 - Present
PRODUCT:	Hilux seat covers for Double cab with airbags and rear bench with armrest



VERY IMPORTANT

a.) PLEASE READ THESE INSTRUCTIONS CAREFULLY BEFORE COMMENCING WITH ANY FITMENT.

TOOLS AND MATERIALS REQUIRED TO FIT

- Clean hands, short fingernails and no open wounds.

- 12mm Socket wrench (re-tighten bolts to 25-30NM)
-


CAUTION

Ensure that your workmanship is of the highest professional standard and that you do not soil, scratch or damage the vehicle or accessory you are about to fit.



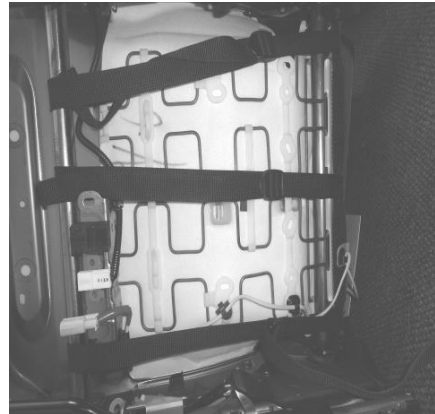






Ensure that you make provision for a clean area, to place components removed.

Hilux Double Cab	NO.	ITEM	CHECKED
	1	Driver side seat cover	
	2	Driver side backrest cover.	
	3	Driver detachable headrest cover	
	4	Passenger side seat cover.	
	5	Passenger side backrest cover.	
	6	Passenger detachable headrest cover.	
	7	Centre console cover.	

+

	8	40 rear bench seat cover.	
	9	60 rear bench seat cover	
	10	Solid rear bench backrest cover.	
	11	Driver side rear bench detachable headrest cover.	
	12	Centre rear bench detachable headrest cover.	
	13	Passenger side rear bench detachable headrest cover.	
CHECKED BY:		TOTAL PIECES:	

INSTALLATION PROCEDURE - Remove all headrests and loosen all webbing straps and buckles on seat covers.

<p>STEP 1</p> 	<p>STEP 2</p> 	<p>STEP 3</p> 
<p>Start with passenger seat. Passenger seat. Undo the elastic strap underneath the seat which holds the flap that protects the electronic wires in the seat.</p>	<p>Passenger seat. Pull cover over seat bottom and feed three straps through gap between backrest and seat bottom.</p>	<p>Passenger seat. Feel for the straps at the back of the seat, pull it to the front and around the bar on the bottom of the seat then back to the buckle at the back of the seat.</p>
<p>STEP 4</p> 	<p>STEP 5</p> 	<p>STEP 6</p> 
<p>Passenger seat. Pull cover over seat backrest, feed three straps same as in step 2, pull to the front and thread through buckles on the front of the seat.</p>	<p>Passenger seat. Position and smooth out covers to line up with the seat and tighten straps to hold seat covers secure. Thread left and right side webbing straps on the side of the seat and attach to left and right buckles at back of squab cover.</p>	<p>Passenger seat. NB. Webbing strap on the door side should be fed through seat plastic and the strap on the consol side goes around the seat. Tighten all webbing buckles and smooth out fabric for a neat finish. Driver's seat – as per Passenger's seat.</p>
<p>STEP 7</p> 	<p>STEP 8</p> 	<p>STEP 9</p> 
<p>Rear Bench. Lift up the 60/40 rear bench seats and remove (5x) 12mm bolts to release bench from vehicle.</p>	<p>Rear Bench. Firmly lift the bench, remove from the vehicle & place in a clean area to continue with the fitment of the seat covers.</p>	<p>Rear bench backrest. Pull cover over the backrest and unzip the armrest section. Feed the buckles through the gap between the backrest and seat bottom.</p>

STEP 10

Rear bench backrest. Feed the webbing straps down the back of the backrest and thread through buckles at the bottom. Tighten webbing straps.

STEP 11

Rear bench backrest. Pull the armrest flaps around the armrest then join Velcro on the side of cover (as displayed in picture).

STEP 12

Rear bench 60-seat. Lift up armrest and zip closed.

STEP 13

Rear bench 60-seat. Pull seat bottom cover over the 60-seat and feed buckles through gap in the middle of the backrest and seat bottom.

STEP 14

Rear bench 60-seat. Lift seat bottom completely, feel for the buckles on the bottom of the backrest and thread webbing straps through the buckles. Position and smooth out seat cover then tighten straps to keep cover in place.

STEP 15

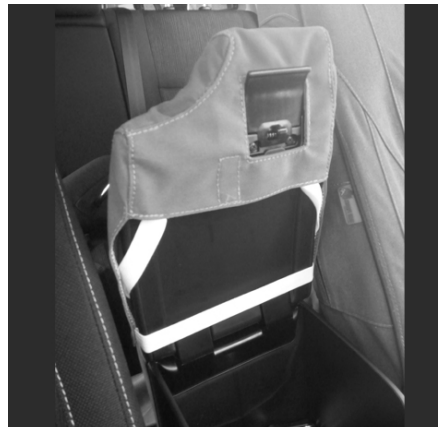
Rear bench 60-seat. Take the one side strap through the loop at the bottom of the seat then join with the other side strap with the buckle and tighten to keep seat cover sides secure.
40-seat as per 60-seat

STEP 16

Headrest covers. When done fitting the seat covers replace all headrests and cover with headrests covers. Pull down for snug fit and secure cover with Velcro at the bottom.
NB. Re-bolt bench seat in vehicle (tighten bolts to 20-35nm).

STEP 17

Centre console cover. Lift up centre console.

STEP 18

Centre console cover. Pull the cover onto the centre console. Making sure lower elastic is as shown.

STEP 19



Centre console cover. Hook elastics around back corners of console. Make sure they are not twisted.

STEP 20



Centre console cover. Feed Velcro under the back of the console (between the console and the plastic hinge).

STEP 21



Centre console cover. Pull Velcro tight and fasten to the Velcro under the centre console.

STEP 22



Centre console cover. Check fitment and adjust if necessary.

DEALER STAMP:

Place fitting instructions in vehicle cubby hole after fitment.

ENSURE THAT VEHICLE IS LEFT UNSCRATCHED, CLEAN & TIDY AND FREE OF ANY DUST, GRIME OR GREASE